

FTB 310 - LITE

Medium Intensity White Xenon System

Application

The FTB 310 LITE is an FAA L865 system that includes a white xenon flashing light for day and night to create an FAA tower type D1 or D2 for structures between 200' and 500' AGL.

Features/Benefits

- ◆ Automatic fail safe to day mode and notification if system has not changed states in 19 hours
- ◆ (3) dry contact data points
- ◆ Fresnel optics minimizes light scatter
- ◆ (12) LED indicators to convey operating status
- ◆ (2) Year parts warranty on all Xenon system components including tubes
- ◆ Flash brand FREP power cable
- ◆ NEMA 4X outdoor rated stainless steel enclosure
- ◆ Accommodates 120-240 VAC 50/60 Hz
- ◆ Wireless synchronization available
- ◆ Optional: upgrade to Eagle 1.0
- ◆ 24/7/365 Monitoring & Call Center services
- ◆ TIA-222 certified for all mounting hardware
- ◆ Listed on the FAA [Buy American Act](#) registry



Dry Contact Monitoring

The dry contact alarm data points on all Flash Xenon products are configurable for normally open or normally closed. Alarms contacts are provided for white beacon.



Power Consumption


- ◆ 130w—White Day
- ◆ 55w—White Night

FTB 310 - LITE

Medium Intensity White Xenon System

XENON

Diagram from FAA Advisory Circular AC 70/7460-1K Change 2, A1-18. The FAA determination of no hazard for these towers are: Chapters 2, 4, 6

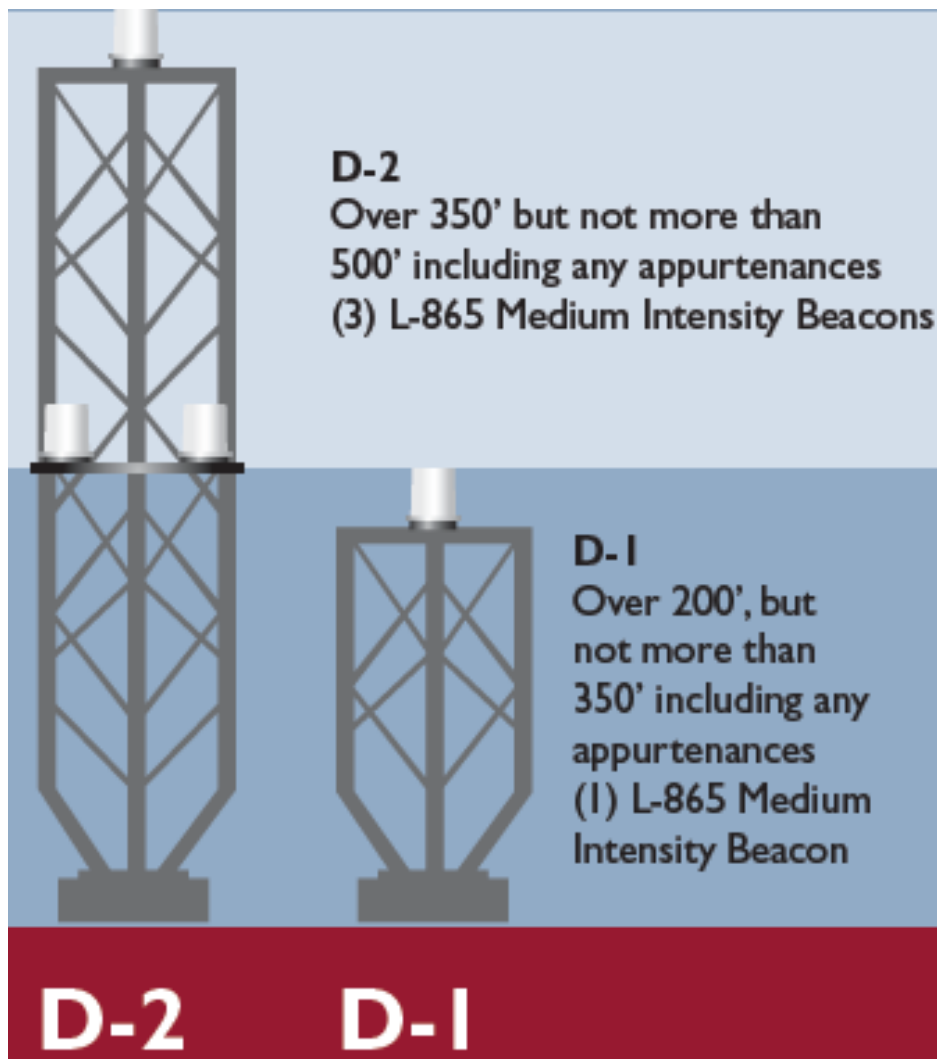

These guidelines are for reference only. Please contact Flash for specific questions regarding obstruction marking.

332 Nichol Mill Lane
Franklin, TN 37067



888-313-5274
flash.info@spx.com
www.flashtechnology.com