

# FTS 2201 A1 LED

## Medium Intensity Red LED Lighting System

LED

### Application

The FTS 2201 is an FAA L864 system that includes a red LED flashing light for night and (3) LED markers to create FAA tower types A1 or A2 for structures between 150' and 700' AGL.

### Features/Benefits

- ◆ Automatic fail safe to night mode and notification if system has not changed states in 19 hours
- ◆ 5 year warranty
- ◆ Flash brand FREP power cable
- ◆ (1) Dry contact monitoring data point
- ◆ Patented optics eliminate ground scatter
- ◆ No EMI or RF
- ◆ Variable nominal supply voltage 120VAC or 240VAC
- ◆ Manual "ON-Auto-OFF" switch
- ◆ Photocell mode control with status indicators
- ◆ Controls (1) L-864 flashing LED beacon and or up to (8) LED steady side lights
- ◆ Lockable weatherproof enclosure
- ◆ 24/7/365 Monitoring and Call Center services
- ◆ TIA-222 certified for all mounting hardware



### Power Consumption

- ◆ Controller—4w
- ◆ Beacon—20w
- ◆ Markers—6.8w each

332 Nichol Mill Lane  
Franklin, TN 37067



888-313-5274  
flash.info@spx.com  
www.flashtechology.com


# FTS 2201 A1 LED

## Medium Intensity Red LED Lighting System



LED

**Diagram from FAA Advisory Circular AC 70/7460-1K Change 2, A1-18. The FAA determination of no hazard for these towers are: Chapters 2, 3, 4, 5, 12**

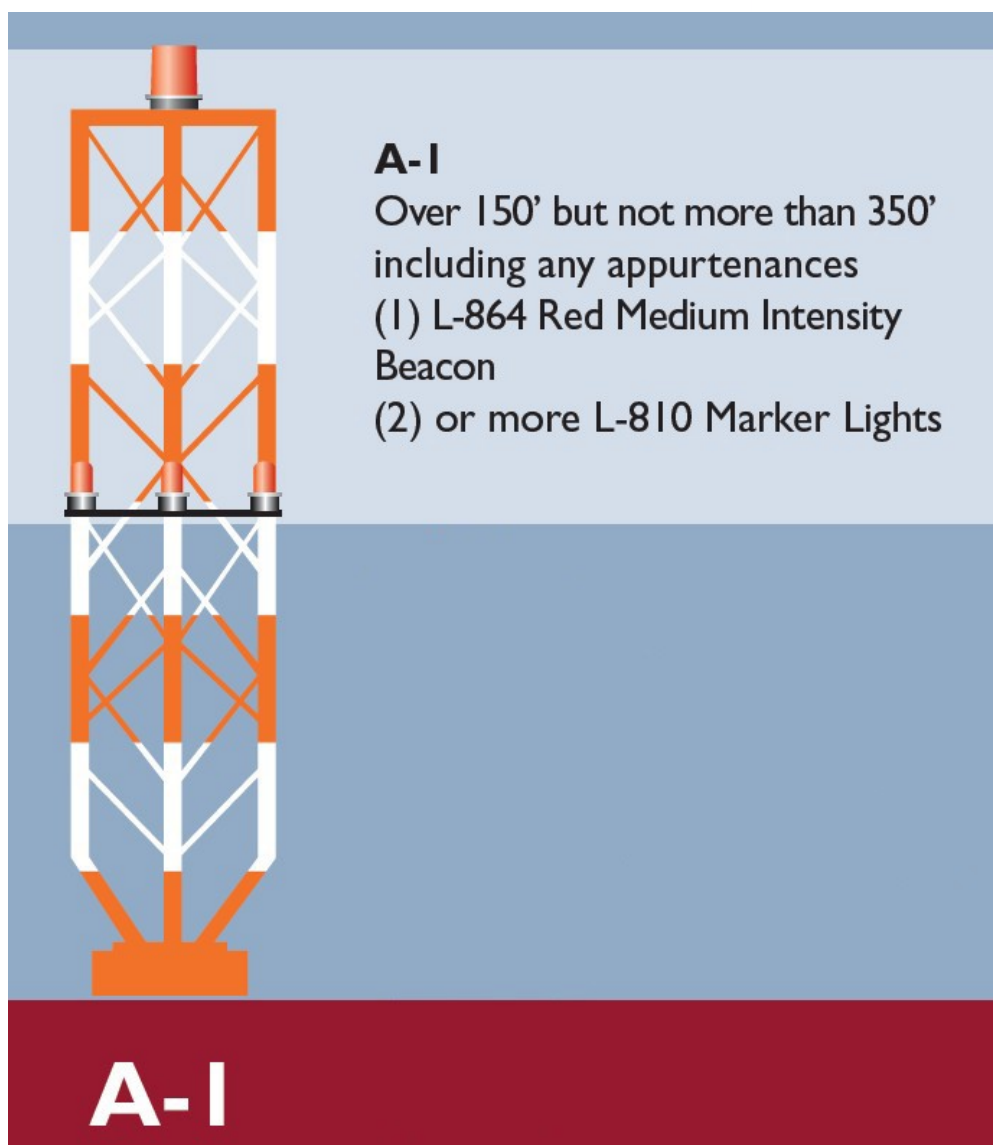

These guidelines are for reference only. Please contact Flash for specific questions regarding obstruction marking.

332 Nichol Mill Lane  
Franklin, TN 37067



888-313-5274  
flash.info@spx.com  
www.flashtechology.com