

Installation Instruction for Wi-Fi External Antenna Mounting Kit (P/N 1370191)



*Bottom View of
SC 370X Enclosure*

5991618 – Hub Conduit 3/4”



5990253 – Clamp Adjustable 1 1/6” – 2” SS

5905231 – Wi-Fi External Antenna (FOR REFERENCE)

5990290 - Nipple Conduit 3/4” x 12” Long


5990253 – Clamp Adjustable 1 1/6” – 2” SS

5991885 – Coupling Conduit 3/4”

4900156 – Conn Cord
3/4” NPT BLK Plastic;

5362009 – Conn
Custom Insert

See Notes

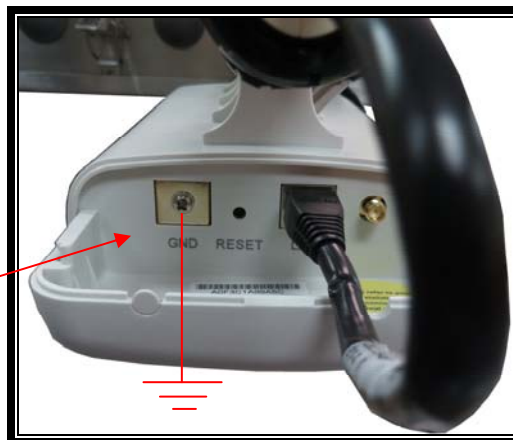

4362028 – Cable CAT5 (FOR REFERENCE)

Notes: (refer to Wi-Fi Option Antenna Installation section in FTS 370X reference manual)

1. Center the Wi-Fi Antenna on the conduit assembly and attach using the two adjustable clamps. The top of the Wi-Fi Antenna must be located nearest the conduit hub.
2. Locate and remove the access cover from the back of the Wi-Fi Antenna and install the CAT5 cable.
3. Route the CAT5 cable through the cord connector and into the SC 370. Leave a small drip loop between the antenna and the conduit assembly.
4. Install ground wire from Wi-Fi Antenna to site ground.
5. Remove the pre-punched hole plug for ground wire routing. Replace the access cover.