



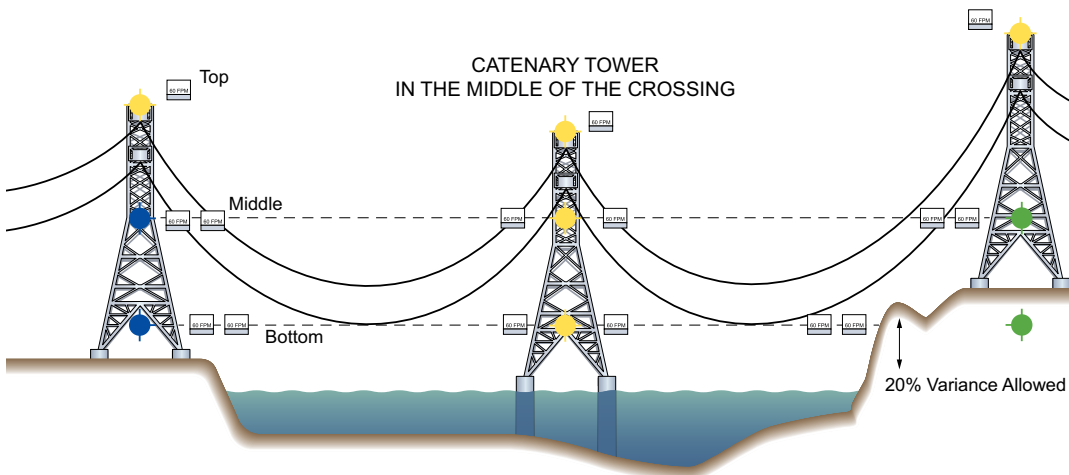


FAA Lighting Catenary

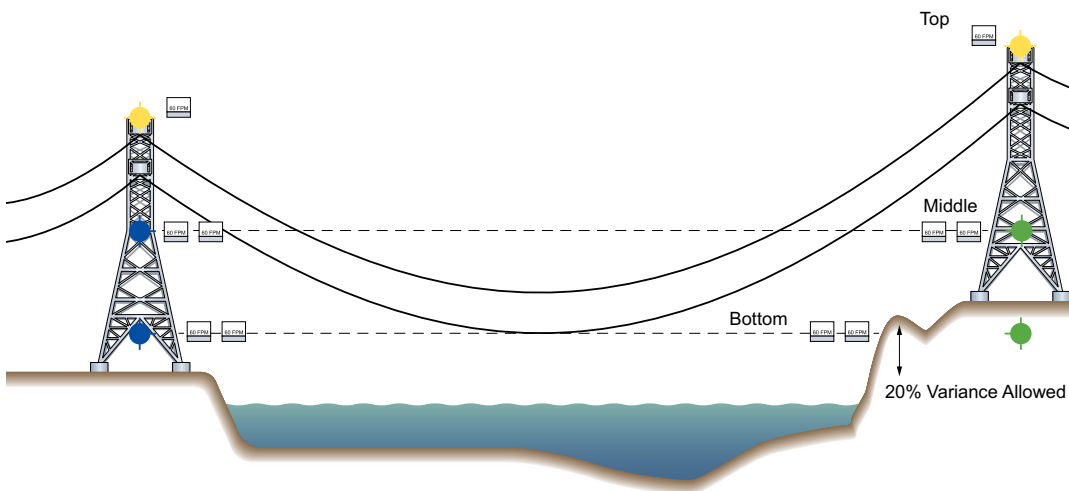


Day Protection = 270,000 cd White Light
 Day Protection = 20,000 cd White Light
 Night Protection = 2,000 cd Red Light
 Flash Sequence = Middle | Top | Bottom

Bright Ideas. Brilliant Results.

Flash Technology
 332 Nichol Mill Lane
 Franklin, TN 37067-8203 USA
 T +1 615 503 2000
 T +1 888 313 5274
 F +1 615 261 2600
flashtechonology.com



-  = L-857 (Flashing White Light)
(Catenary Light 60 FPM) - (3) Flashheads per level for 360° coverage)
-  = L-866 (Flashing White Light)
(Catenary Light 60 FPM)
-  = L-885 (Flashing Red Light)
(Catenary Light 60 FPM)

-  = 360° Visibility
-  = 180° Visibility (RIGHT)
-  = 360° Visibility (LEFT)



Data and specifications subject to change without notification.

©2017 Flash Technology
 All rights reserved.