

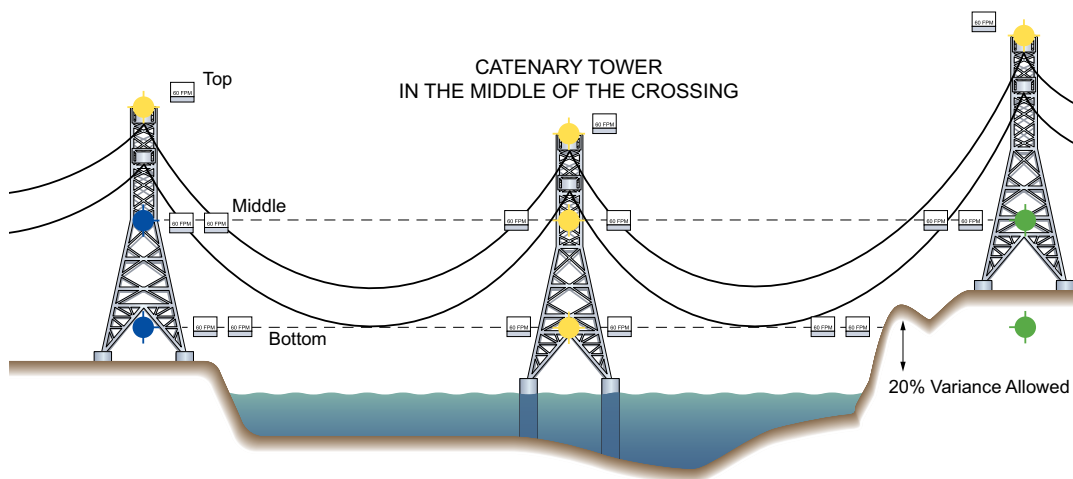
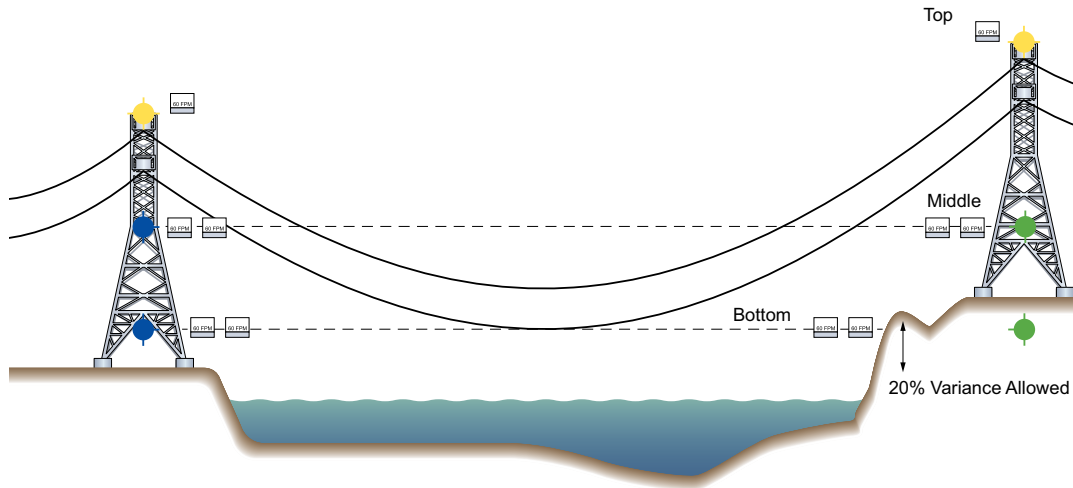
# FAA Lighting Catenary



Day Protection = 270,000 cd White Light




Day Protection = 20,000 cd White Light

Night Protection = 2,000 cd Red Light

Flash Sequence = Middle | Top | Bottom



-  = L-857 (Flashing White Light)  
(Catenary Light 60 FPM) - (3) Flashheads per level for 360° coverage)
-  = L-866 (Flashing White Light)  
(Catenary Light 60 FPM)
-  = L-885 (Flashing Red Light)  
(Catenary Light 60 FPM)

-  = 360° Visibility
-  = 180° Visibility (RIGHT)
-  = 360° Visibility (LEFT)