


ICAO Lighting Dual Types A & C

Flashing white high intensity lights for day, steady red medium intensity for night
ICAO Annex 14, 8th Edition

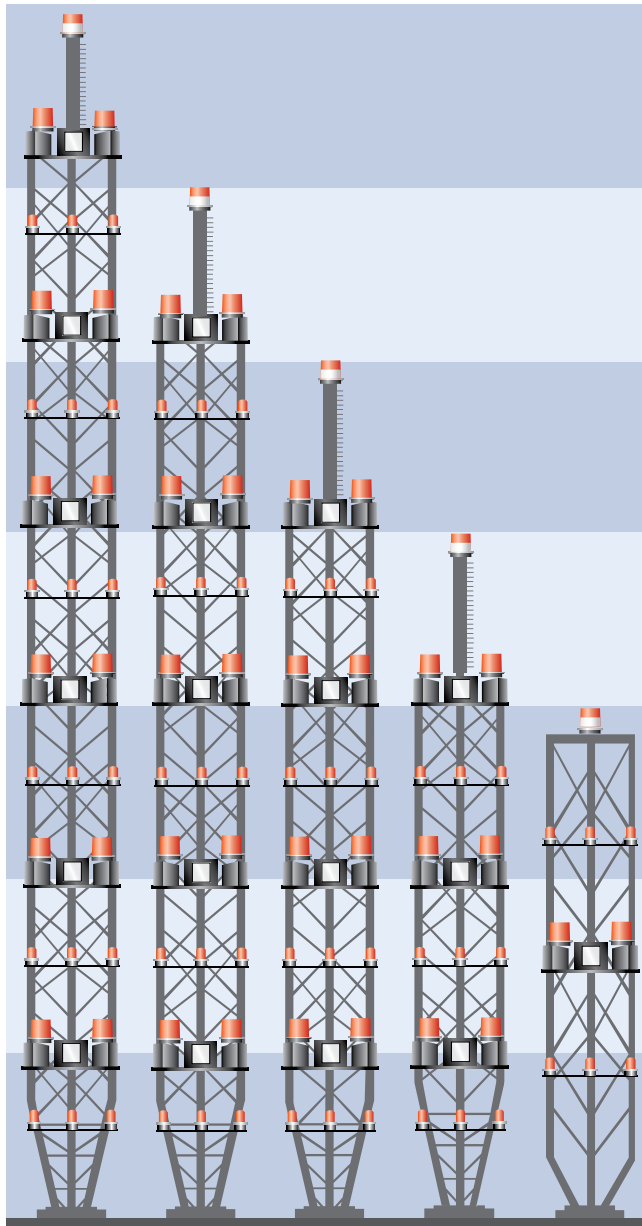

525 - 630 m*

- 1 medium intensity type A & B flashing dual beacon**
- 12 or more high intensity type A flashing white & medium intensity type C steady red beacons
- 12 or more medium intensity type C steady red lights

420 - 525 m*

- 1 medium intensity type A & B flashing dual beacon**
- 10 or more high intensity type A flashing white & medium intensity type C steady red beacons
- 10 or more medium intensity type C steady red lights

315 - 420 m*

- 1 medium intensity type A & B flashing dual beacon**
- 8 or more high intensity type A flashing white & medium intensity type C steady red beacons
- 8 or more medium intensity type C steady red lights

210 - 315 m*

- 1 medium intensity type A & B flashing dual beacon**
- 6 or more high intensity type A flashing white & medium intensity type C steady red beacons
- 6 or more medium intensity type C steady red lights

150 - 210 m*

- 1 medium intensity type A & B flashing dual beacon**
- 4 or more high intensity type A flashing white & medium intensity type C steady red beacons
- 4 or more medium intensity type C steady red lights

* Height including any appurtenances.

** Antenna light required if appurtenance exceeds 12 m above structure