


# ICAO Lighting Dual Types A & B

Flashing white medium intensity for day, flashing red medium intensity for night  
ICAO Annex 14, 8th Edition

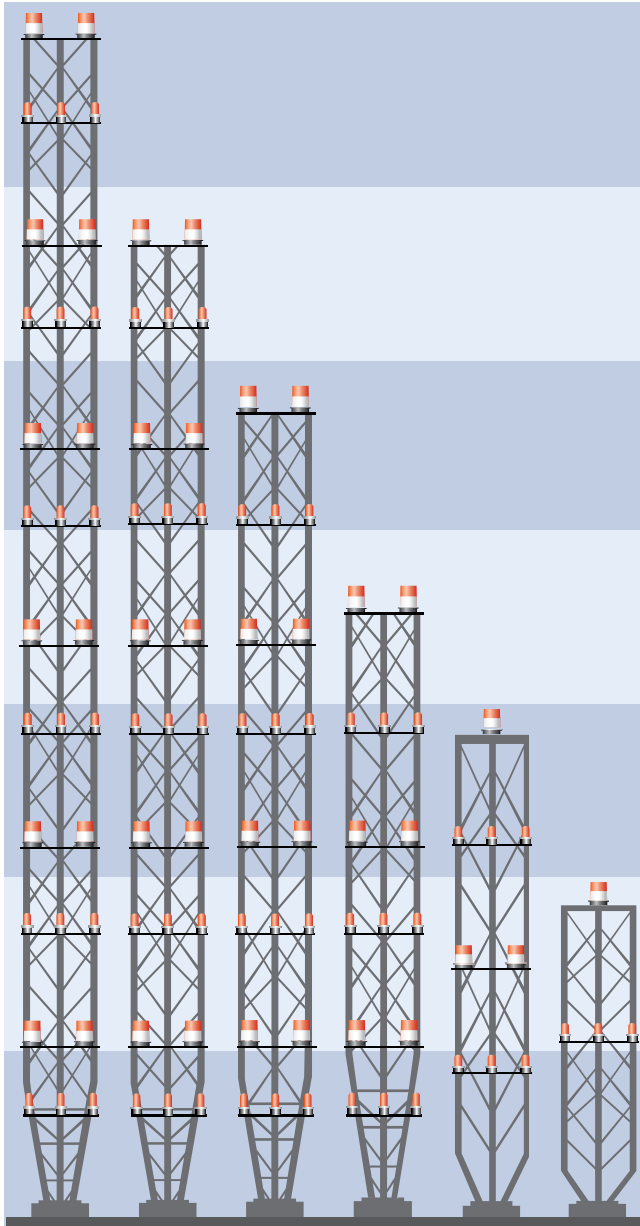

## 525 - 630 m\*

- 13 or more medium intensity type A flashing white and type B flashing red beacons
- 12 or more low intensity type B steady red lights

## 420 - 525 m\*

- 11 or more medium intensity type A flashing white and type B flashing red beacons
- 10 or more low intensity type B steady red lights

## 315 - 420 m\*

- 9 or more medium intensity type A flashing white and type B flashing red beacons
- 8 or more low intensity type B steady red lights

## 210 - 315 m\*

- 7 or more medium intensity type A flashing white and type B flashing red beacons
- 6 or more low intensity type B steady red lights

## 210 - 315 m\*

- 7 or more medium intensity type A flashing white and type B flashing red beacons
- 6 or more low intensity type B steady red lights

## 45 - 105 m\*

- 1 or more medium intensity type A flashing red and type B white red beacon
- 2 or more low intensity type B steady red lights

\* Height including any appurtenances.  
High intensity obstacle lighting is recommended on structures of 150 m or more. If medium intensity lighting is used, marking will also be required.