

# ICAO Lighting Catenary

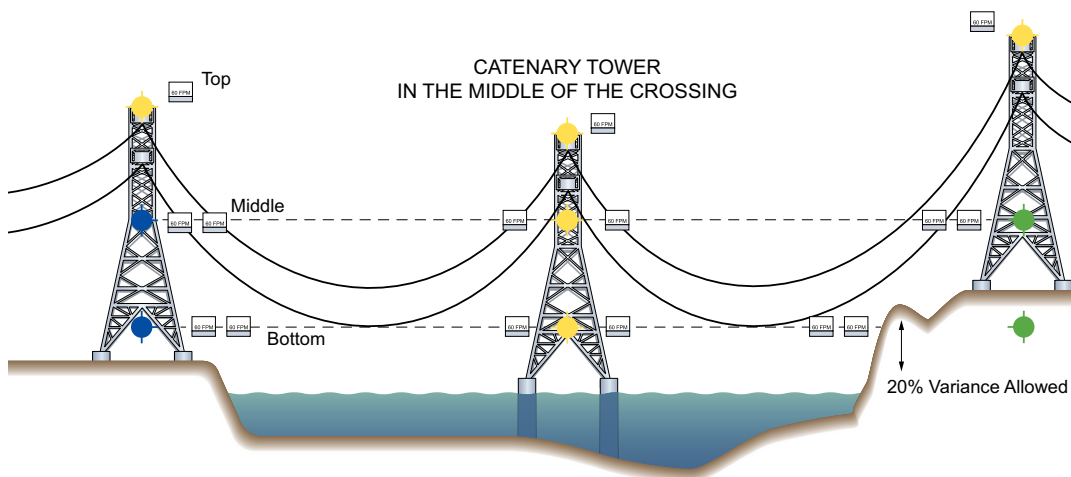
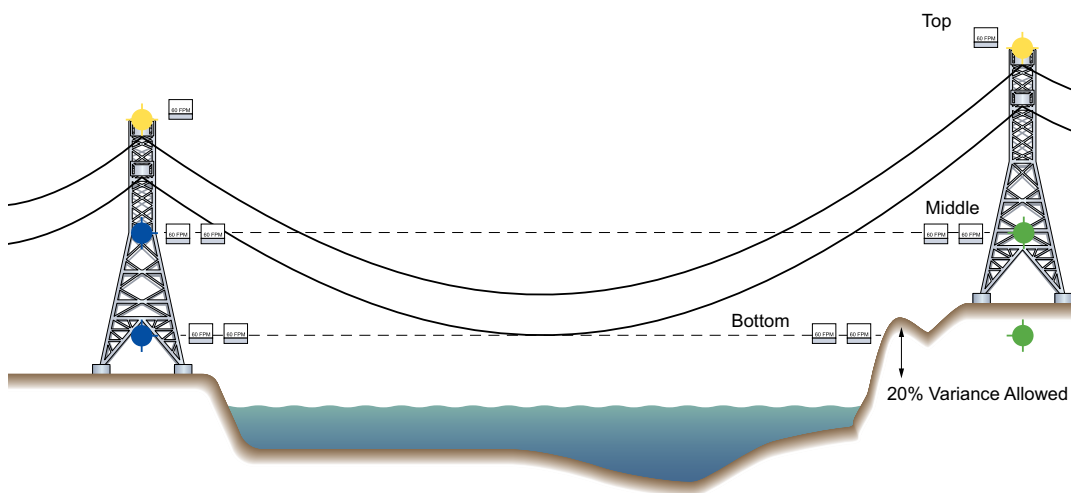
Day Pand Twilight = 100,000 cd White Light  
 Night Protection = 2,000 cd Red Light  
 Flash Sequence = Middle | Top | Bottom



**Bright Ideas. Brilliant Results.**




Flash Technology  
 332 Nichol Mill Lane  
 Franklin, TN 37067-8203 USA

T +1 615 503 2000  
 T +1 888 313 5274  
 F +1 615 261 2600

flashtechnology.com



 = High Intensity Type B Flashing White  
 = Medium Intensity Type B Red Flashing

 = 360° Visibility  
 = 180° Visibility (RIGHT)  
 = 360° Visibility (LEFT)



ISO 9001:2015

Data and specifications subject to change without notification.

©2017 Flash Technology  
 All rights reserved.