

FTB 302r Medium Intensity Red AOL Strobe

Designed to meet FAA L-864 obstruction lighting requirements, the FTB 302r system includes a high intensity red xenon flashing beacon for night. It is suitable for structures taller than 150' AGL (FAA tower types A1-A6), where a red flashing beacon is needed to complement a high intensity system. The system utilizes the FTC 121 controller.

Manufactured to specifications for FAA Type L-864, FAA-AC 150/5345-43F.

Standard Features

- Fresnel optics minimizes light scatter
- 2-year parts warranty on all xenon system components including tubes
- NEMA 4X outdoor rated stainless steel enclosure
- Accommodates 120-240 VAC 50/60 Hz
- 24/7/365 monitoring and call center services
- TIA-222 certified for all mounting hardware
- Listed on the FAA Buy American Act registry

Power Consumption


- 75 watts - red night




FTB 302r

Tower Guidelines

FAA 70/7460-1L

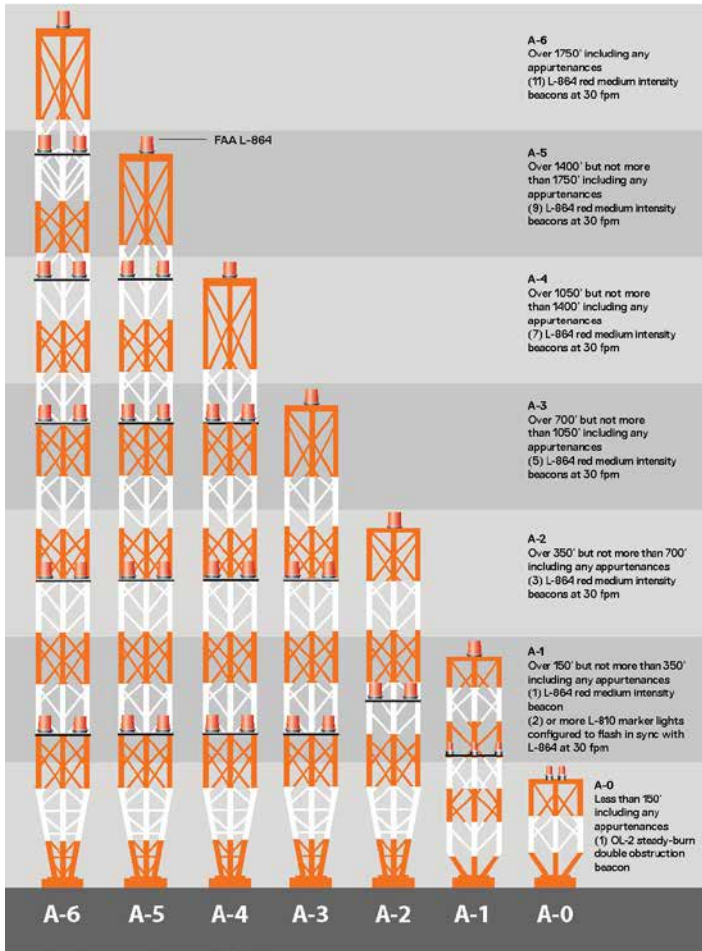

FAA 70/7460-1K

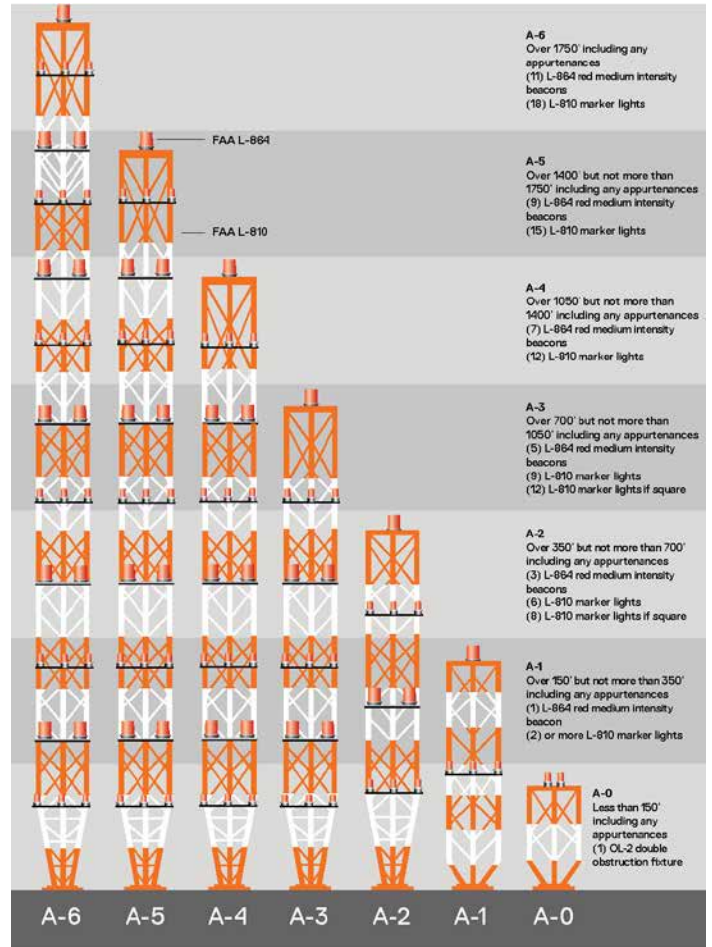

FLASH TECHNOLOGY 

flashsales@spx.com | flashtechology.com/obstruction | 1.615.503.2000

©2020 Flash Technology. All rights reserved. Data and specifications subject to change without notification. ISO 9001:2015. D302R-01 Rev C