

FTB 302 Medium Intensity White AOL Strobe

The FTB 302 is an L-865 medium intensity white xenon strobe that provides a white flashing light for day and night for structures over 500' AGL including appurtenances 40' or more above the main guyed structure (FAA tower types C3-6).

Manufactured to meet specifications for FAA Type L-865, FAA-AC 150/5345-43F.

Standard Features

- Interfaces with the FTC 121 and FTC 140 controllers
- Fresnel optics minimizes light scatter
- 2-year parts warranty on all xenon system components including tubes
- NEMA 4X stainless steel outdoor rated enclosure
- Available in multiple input voltages
- Custom installation kits and stamped drawings
- Optional 24/7/365 monitoring and call center services
- Component-level technical support M-F 7am-7pm Central time
- TIA-222 certified for all mounting hardware
- Listed on the FAA Buy American Act registry



Power Consumption

- 130 watts - white day
- 55 watts - white night


Custom Conduit and Wire Kits

For over 40 years Flash has designed and supplied FAA and NEC compliant electrical systems for towers, chimneys and other structures. Our expertise includes lighting systems, elevator circuits, utility circuits, AC electrical distribution platform circuits, area lighting, fiber optic, telco, communication, lift booms and other needs. State engineering stamped drawings for the United States and some US properties are available as an option.


FTB 302

Tower Guidelines

FAA 70/7460-1L

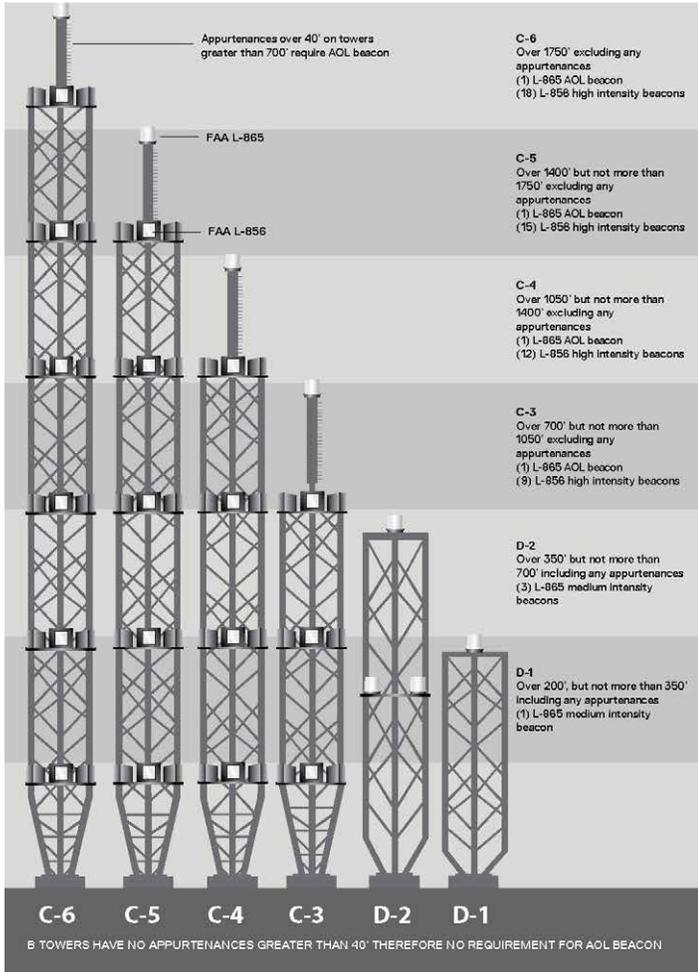

FAA 70/7460-1K

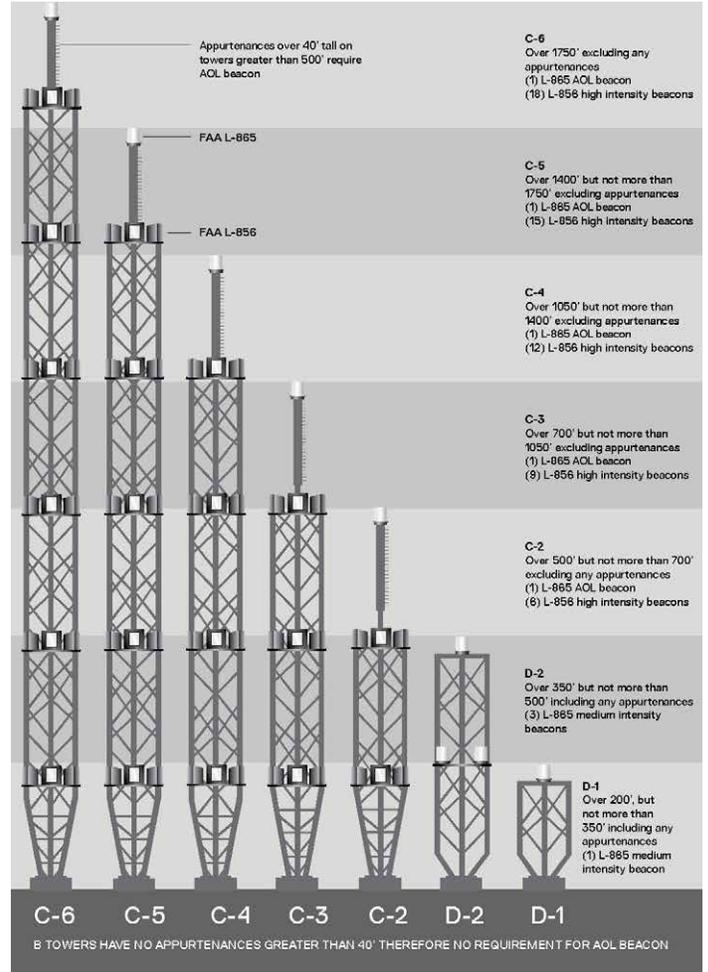

FLASH TECHNOLOGY

flashsales@spx.com | flashtechonology.com/obstruction | 1.615.503.2000

©2020 Flash Technology. All rights reserved. Data and specifications subject to change without notification. ISO 9001:2015. D3020-01 Rev D