

FTB 310 White Xenon Lighting System

The FTB 310 is an L-865 system that includes a white xenon flashing light for day and night for structures 200' to 700' AGL (FAA tower type D1 -D2).

This product is ICAO-compliant.

Standard Features

- Automatic fail safe if system has not changed modes in 19 hours
- 3 dry contact alarm points
- Fresnel optics minimizes light scatter
- 12 LED indicators to convey operating status
- 2-year parts warranty on all system components including tubes
- RS485 bus for plug and play install to FTW series monitoring systems
- NEMA 4X outdoor rated stainless steel enclosure
- Accommodates 120 or 240 VAC 50 or 60 Hz
- Mounting hardware is TIA-222G certified
- Listed on the FAA Buy American Act registry

System Options

- Upgrade to Eagle for 24/7/365 monitoring & call center services
- Wireless synchronization




FTB 310

SPECIFICATIONS


FH Power Consumption	White day – 130 watts White night – 55 watts
FH Photometrics	White day – 40 fpm – 20,000 ± 25% ECD White night – 40 fpm – 2,000 ± 25% ECD
Input Voltage	120 or 240 VAC
Frequency	50 Hz or 60 Hz
FH Dimensions	17 x 18.25"
FH Weight	17 lbs (7.7kg)
FH Aerodynamic Wind Area	0.93 ft2
Controller Dimensions	14 x 16.75 x 8.44"
Controller Weight	51 lbs (23 kg)
Protection Rating	IP65, NEMA 4X

FAA WHITE TOWER LIGHTING

FAA 70/7460-1L

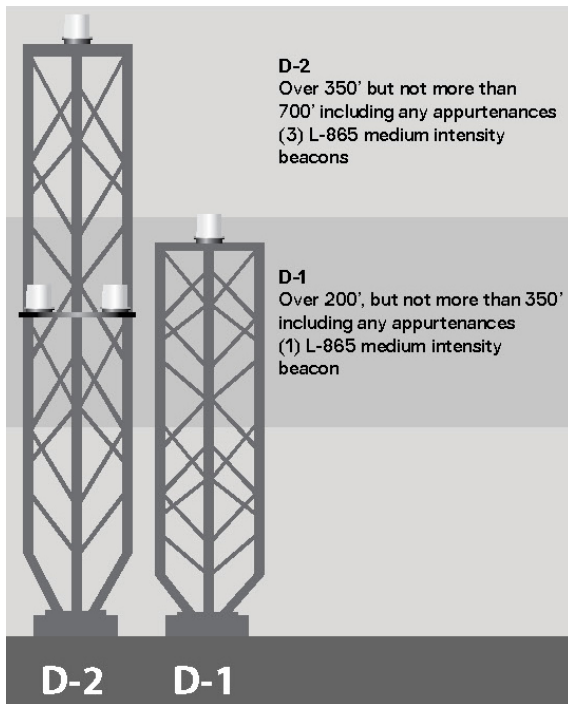

FAA 70/7460-1K

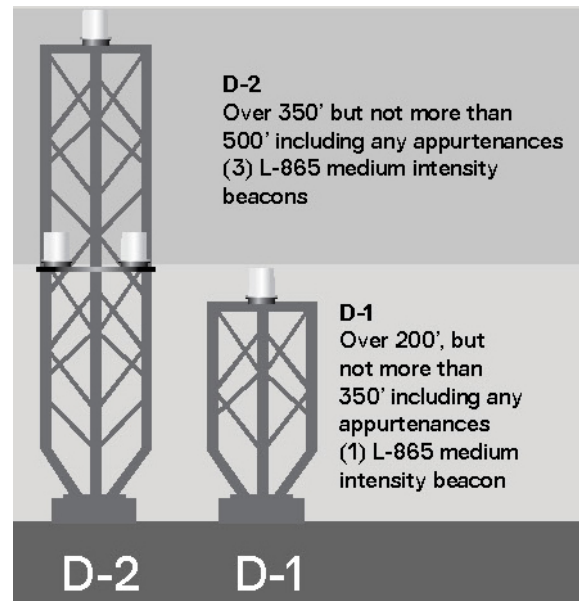

FLASH TECHNOLOGY 

flashsales@spx.com | flashtechology.com/obstruction | 1.615.503.2000

©2020 Flash Technology. All rights reserved. Data and specifications subject to change without notification. ISO 9001:2015. D3100-01 Rev D