








# FAA General Aviation Elevated Helipads

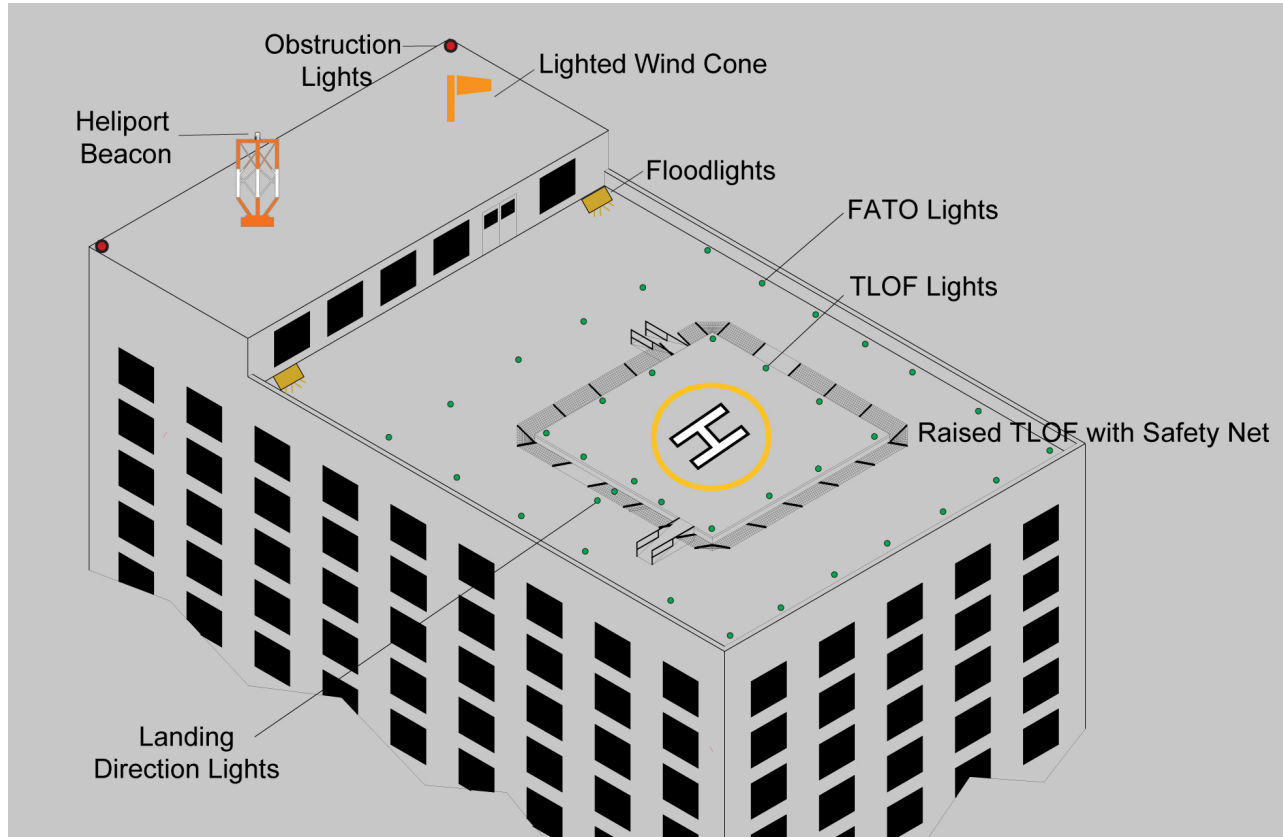

-  **FATO Lights and TLOF Lights**  
Green omnidirectional L-860HR or flush L-860HS lights spaced no more than 25 ft. apart
-  **Landing Direction Lights**  
5 green L-860HR or L-860HS lights marking the approach centerline. Spaced 15 ft. apart, beginning between 20 and 60 ft. from the TLOF perimeter.
-  **Floodlights**  
May improve visibility for heliport operations. Install clear of the TLOF, FATO and safety area.
-  **Obstruction Lights**  
Mark any obstructions near the heliport with red obstruction lights per FAA AC 70/7460.
-  **Heliport Beacon**  
An optional L-801H or L-802H identification beacon flashing white/green/yellow at 30-45 fpm.
-  **Wind Cone**  
An internally lit L-806 or L-807 helicopter windsock for nighttime flights.